



Water Well And Pump Record

Completion is required under authority of Part 127 Act 368 PA 1978.



Import ID:

Failure to comply is a misdemeanor.

Tax No: 0719401007	Permit No: EHW-2025-	County: Oakland	Township: Springfield			
Well ID: 63000084909		Town/Range: 04N 08E	Section: 19	Well Status: Active	WSSN:	Source ID/Well No: OW-DB-1
Elevation:		Distance and Direction from Road Intersection:				
Latitude: 42.732315		South of French Ln. North of Big Lake Rd.				
Longitude: -83.553307		Well Owner: Burroughs Materials Co./ Levy				
Method of Collection: Address Matching-House Number		Well Address:		Owner Address:		
		6651 Ormond Road Davisburg, MI 48350		6651 Ormond Road Davisburg, MI 48350		

Drilling Method: Other	Well Use: Other	Pump Installed: No			
Well Depth: 476.00 ft.	Date Completed: 5/13/2026	Pressure Tank Installed: No			
Well Type: New	Height: 1.00 ft. above grade	Pressure Relief Valve Installed:			
Casing Type: Other					
Casing Joint: Welded					
Casing Fitting: None					
Diameter: 2.00 in. to 415.00 ft. depth					
Borehole: 8.50 in. to 476.00 ft. depth					
Static Water Level: 136.00 ft. Below Grade	Yield Test Method: Test pump	Formation Description	Thickness	Depth to Bottom	
Well Yield Test:		Light Brown Sand Gravel Silt	5.00	5.00	
		Light Brown Sand & Clay Hard W/Gravel	10.50	15.50	
		Light Brown Sand W/Gravel	44.50	60.00	
Screen Installed: Yes	Filter Packed: No	Brown Clay Very Hard	0.50	60.50	
Screen Diameter: 2.00 in.	Blank:	Brown Sand W/Gravel	35.50	96.00	
Screen Material Type: Stainless steel-slotted		Gray Sand Wet/Moist	8.00	104.00	
Screen Installation Type: Telescoped		Gray Silt & Sand Clayey	5.00	109.00	
Slot	Length	Set Between	Gray Sand Wet/Moist	2.00	111.00
12.00	20.00 ft.	395.00 ft. and 415.00 ft.	Gray Sand Silt Clay Wet/Moist	4.00	115.00
20.00	10.00 ft.	415.00 ft. and 425.00 ft.	Gray Sand & Clay Very Hard	41.00	156.00
Fittings: Coupling		Gray Sand Silt Clay W/Sand Stringers	11.00	167.00	
		Gray Sand Silt Clay W/Gravel Very Fine	9.00	176.00	
		Gray Sand & Clay W/Gravel	11.00	187.00	
		(Continued On Page 2)			
Well Grouted: Yes	Grouting Method: Grout pipe outside casing	Geology Remarks:			
Grouting Material	Bags	Additives	Depth		
Neat cement	52.00	None	0.00 ft. to 415.00 ft.		
Wellhead Completion: 12+ inches above grade		Drilling Machine Operator Name: Cascade Drilling Services			
Nearest Source of Possible Contamination:		Employment: Subcontractor			
Type	Distance	Direction			
None					
			(Continued on page 2)		

General Remarks: Sonic Drill by Cascade Drilling Services for Observation Well #1. Touched bedrock and stopped.

Other Remarks: Well Use:Observation, Drilling Method:Sonic, Casing Type:schedule 80 PVC, Coordinate Source:Map



Water Well And Pump Record

Completion is required under authority of Part 127 Act 368 PA 1978.

Failure to comply is a misdemeanor.




Import ID:

Tax No: 0719401007	Permit No: EHW-2025-	County: Oakland	Township: Springfield				
Well ID: 63000084909 Elevation: Latitude: 42.732315 Longitude: -83.553307 Method of Collection: Address Matching-House Number		Town/Range: 04N 08E	Section: 19	Well Status: Active	WSSN:	Source ID/Well No: OW-DB-1	
		Distance and Direction from Road Intersection: South of French Ln. North of Big Lake Rd.					
		Well Owner: Burroughs Materials Co./ Levy					
		Well Address: 6651 Ormond Road Davisburg, MI 48350			Owner Address: 6651 Ormond Road Davisburg, MI 48350		

(Continued from Page 1)

Formation Description	Thickness	Depth to Bottom	OTHER REMARKS:
Gray Clay W/Gravel Firm	7.00	194.00	Well Use: Observation, Drilling Method: Sonic, Casing Type: schedule 80 PVC, Coordinate Source: Map
Gray Sand Silt Clay W/Gravel Stringers	34.00	228.00	
Gray Silt & Sand W/Gravel	3.00	231.00	
Gray Silt Sand Clay W/Gravel Dense	9.00	240.00	
Gray Sand & Clay W/Gravel Firm	16.00	256.00	
Clay & Silt W/Sand Gravely	14.00	270.00	
Gray Sand & Clay Gravely	10.00	280.00	
Light Gray Hardpan Clayey W/Gravel	25.00	305.00	
Sand Gravely W/Clay	3.00	308.00	
Gray Hardpan W/Clay Gravely	8.00	316.00	
Gray Sand & Clay W/Gravel	8.50	324.50	
Light Gray Sand W/Gravel	1.50	326.00	
Gray Sand & Clay W/Gravel	4.00	330.00	
Light Gray Sand W/Gravel	2.00	332.00	
Gray Sand & Clay W/Gravel Dense	16.00	348.00	
Blue Sand Clay Gravel	8.00	356.00	
Gray Sand W/Gravel	13.00	369.00	
Gray Sand & Clay W/Gravel	11.00	380.00	
Gray Sand & Clay Soft	12.00	392.00	
Gray Sand & Clay Dense	3.00	395.00	
Gray Silt & Sand W/Gravel	17.00	412.00	
Gray Sand & Clay W/Gravel	4.00	416.00	
Dark Gray Sand W/Gravel	7.00	423.00	
Gray Sand & Clay Dense	10.00	433.00	
Dark Gray Clay Very Hard	3.00	436.00	
Gray Sand Silt Clay Dense	6.00	442.00	
Gray Silt & Sand W/Gravel	6.00	448.00	
Gray Sand & Clay W/Gravel	4.00	452.00	
Boulders W/Gravel W/Cobbles	13.00	465.00	
Shale Marshall Ss	11.00	476.00	
			Contractor Type: Water Well Drilling Contractor Reg No: 25-2380 Business Name: Lyons Well Drilling Business Address: 3159 E. Bristol Rd., Burton, MI, 48529 Water Well Contractor's Certification This well/pump was constructed under my supervision and I hereby certify that the work complies with Part 127 Act 368 PA 1978 and the well code. Signature of Registered Contractor Date

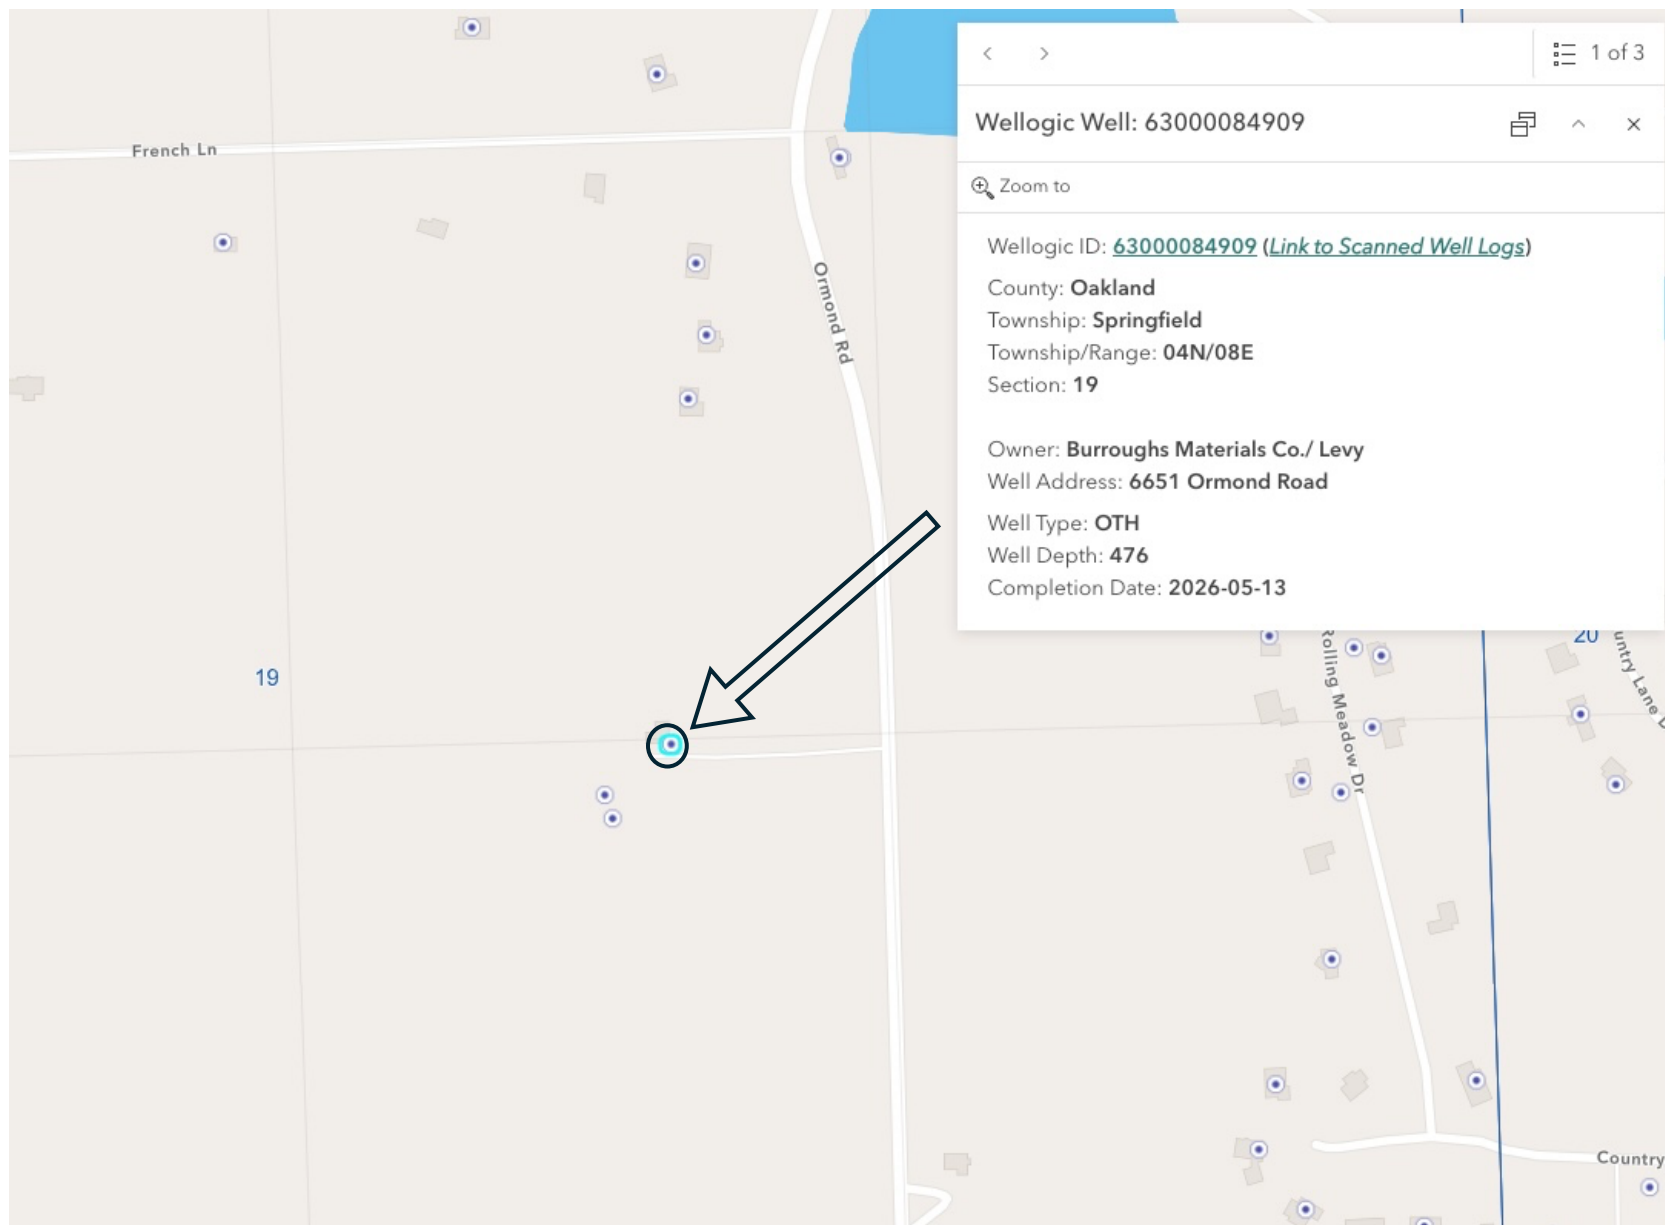

< > 1 of 3

Wellogic Well: 63000084909

Zoom to

Wellogic ID: [63000084909](#) ([Link to Scanned Well Logs](#))

County: **Oakland**

Township: **Springfield**

Township/Range: **04N/08E**

Section: **19**

Owner: **Burroughs Materials Co./ Levy**

Well Address: **6651 Ormond Road**

Well Type: **OTH**

Well Depth: **476**

Completion Date: **2026-05-13**